


Data Sheet_

Corrosion Coupon Racks

With Quick Disconnect Holder

This product bulletin is provided by

www.TheWaterTreatmentStore.com which is a wholly owned subsidiary of Richard Hourigan, Inc. To view our listing of Advantage Controls products available for on line purchase (at 10%-20% discounts) or to order a custom made Advantage Controls package at the same discount rate, CLICK ANYWHERE WITHIN THIS BOX.

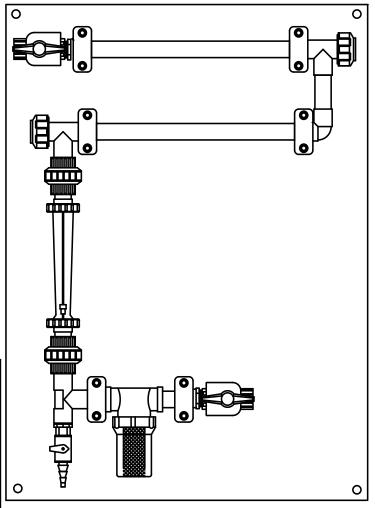

ACR-20-BEG

Key Features

- Built to ASME Specifications
- Quick Release Holder
- Corrosion Resistant
- Polyethylene Panel Mount
- PVC, CPVC Black Iron or Stainless Steel Construction
- Up to Six Coupon Holders
- Inlet & Outlet Ball Valves

Application

Advantage Controls corrosion coupon racks provide a reliable way of monitoring the effectiveness of your water treatment program against the damaging effects of corrosion.

Our revolutionary "Quick Disconnect" coupon holder design with o-ring seal requires no wrenches for removing the coupon. Simple hand loosen and tighten.

All standard models include the coupon holder(s), nylon coupon mounting hardware, inlet and outlet ball valves mounted on a corrosion resistant polyethylene panel for a professional installation appearance.



Quick disconnect style coupon holders available only on 3/4" CPVC & PVC models. Select the material, pipe size, number of holders, and options required.

3/4"(24mm) PVC Sch 80 150 PSI 140°F		3/4"(24mm) CPVC Sch 80 80 PSI 180°F	
ACR-10	one holder		one holder
ACR-20	two holders	ACR-22	two holders
ACR-30	three holders	ACR-32	three holders
ACR-40	four holders	ACR-42	four holders
ACR-50	five holders	ACR-52	five holders
ACR-60	six holders		six holders
1" (25mm) PVC Sch 80 150 PSI 140°F		1" (25mm)CPVC Sch 80 80 PSI @ 180°F	
ACR-11			one holder
ACR-21	two holders	ACR-23	two holders
ACR-31	three holders	ACR-33	three holders
ACR-41	four holders	ACR-43	four holders
ACR-51	five holders	ACR-53	five holders
ACR-61	six holders	ACR-63	six holders
3/4" (24 mm) Black Iron	300 PSI 300°F	3/4"(24mm)Stainles	s Steel 300 PSI 300°F
3/4" (24 mm) Black Iron ACR-15		• •	ss Steel 300 PSI 300°F
. ,	one holder	ACR-10XSS	
ACR-15	one holder two holders	ACR-10XSSACR-20XSS	one holder
ACR-15	one holdertwo holdersthree holders	ACR-10XSS ACR-20XSSACR-30XSS	one holdertwo holders
ACR-15ACR-25ACR-35	one holdertwo holdersthree holdersfour holders	ACR-10XSSACR-20XSSACR-30XSSACR-40XSSACR	one holdertwo holdersthree holders
ACR-15ACR-25ACR-35ACR-45	one holdertwo holdersthree holdersfour holdersfive holders	ACR-10XSSACR-20XSSACR-30XSSACR-40XSSACR-50XSSACR	one holdertwo holdersthree holdersfour holders
ACR-15	one holdertwo holdersthree holdersfour holdersfive holders	ACR-10XSSACR-20XSSACR-30XSSACR-40XSSACR-50XSSACR	one holdertwo holdersthree holdersfour holdersfive holders
ACR-15	one holdertwo holdersthree holdersfour holdersfive holders	ACR-10XSSACR-20XSSACR-30XSSACR-40XSSACR-50XSSACR	one holdertwo holdersthree holdersfour holdersfive holders
ACR-15	one holdertwo holdersthree holdersfour holdersfive holders	ACR-10XSSACR-20XSSACR-30XSSACR-40XSSACR-50XSSACR	one holdertwo holdersthree holdersfour holdersfive holders
ACR-15	one holdertwo holdersthree holdersfour holdersfive holderssix holders	ACR-10XSSACR-20XSSACR-30XSSACR-40XSSACR-50XSSACR	one holdertwo holdersthree holdersfour holdersfive holderssix holders
ACR-15	one holdertwo holdersthree holdersfour holdersfive holderssix holders	ACR-10XSS	one holdertwo holdersthree holdersfour holdersfive holderssix holders

А	Flow Control Offlice, 3 gpm	MODEL	LENGIH
В	Cold Water Flow Indicator, 3/4"	ACR-10	16" (406.4mm)
B-2	Flow indicator 325 psi @ 250°F	ACR-20	16"(406.4mm)
С	Flow Control Orifice, 5 gpm	ACR-30	20"(508mm)
Е	Sample Tee with Valve	ACR-40	25"(635mm)
F	Back Flow Check Valve	ACR-50	31"(787.4mm)
G	³ / ₄ " Clear Strainer	ACR-60	36"(914.4mm)
Н	Steel Y-Strainer	ACR-10B	28"(812.8mm)
J	Clear PVC Piping over Coupon	ACR-20B	
L	3/4" FNPT Opening for Corrator Probe	ACR-30B	32"(711.2mm)
Р	Add 1 Injection to a Pump Mount Shelf	ACR-40B	37"(939.8.4mm)
	,	ACR-50B	

Notes:

Additional options available. Consult dealer for more information.

Recommended coupon size: $4\frac{1}{2}$ "(114.3mm) length x $\frac{1}{2}$ "(12.7mm) width x $\frac{1}{16}$ "15.88mm) thickness with 13/64"(5.16mm) mounting hole.

Get the Advantage -

Advantage Controls 4700 Harold Abitz Dr Muskogee, OK 74403 800-743-7431 phone 888-686-6212 fax www.advantagecontrols.com